

MODEL 350

Taber® Wheel Refacer

Resurface Taber abrading wheels with precision. The Model 350 Wheel Refacer is used to refresh and standardize the contact surfaces of Genuine Taber Calibrade® wheels when they become clogged with debris. Intended for H-10, H-18, H-22 and H-38 abrading wheels, this instrument can also be used to true out of round wheels and correct 'crowning' conditions on both Calibrase® and Calibrade® wheels.

- FULLY ENCLOSED TEMPERED GLASS VIEWING WINDOW FOR BETTER VISIBILITY
- FINE PITCH RADIAL DEPTH ADJUSTMENT
- SAFETY INTERLOCK COVER WITH MOTOR BRAKE FEATURE
- REDESIGNED ENCLOSURE PROVIDES IMPROVED ACCESS TO WORK AREA
- ONE PIECE WHEEL MOUNTING SPINDLE
- RETAINING NUT INCLUDES INTEGRATED WASHER
- INCREASED MOTOR TORQUE
- BALANCED HAND CRANK WITH REVOLVING HANDLE
- SHIELDED TRAVERSE SLIDE
- INDEPENDENT ADJUSTMENT OF DIAMOND TOOL ORIENTATION
- TOOL STORAGE




TABER® WHEEL REFACER

RUGGED DESIGN IS BUILT TO LAST

The refacing diamond tool is mounted in an adjustable holder, which is supported on a shielded traverse slide. Abrading wheels are secured to an arbor. A durable, aluminum housing provides a stable mounting base for the motor to prevent chatter during operation. Attaching the Taber Abraser vacuum unit hose to the rear receptacle draws off abrasive cuttings.




WHEEL REFACER REFERENCE DIMENSIONS

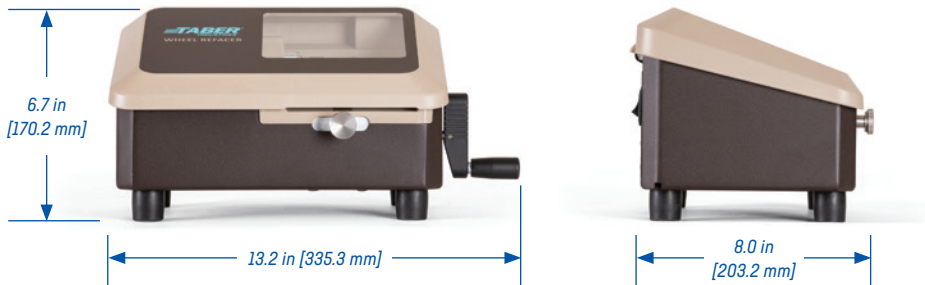

OPTIONAL ACCESSORY (SOLD SEPARATELY)

- MULTIPLE POINT DIAMOND TOOL (USE FOR H-38 WHEELS)

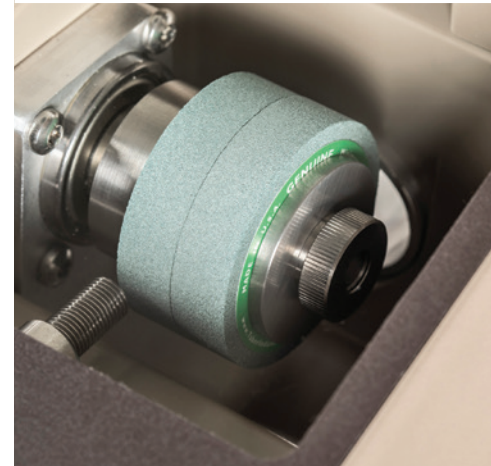

716.694.4000 TOLL FREE 800.333.5300
TaberIndustries.com



Taber Industries
455 Bryant Street
North Tonawanda, NY 14120