Grit Feeder 155/255



Three-Body Abrasion Testing

Expand testing methods for Taber Rotary Abrasers.

The Grit Feeder is used to evaluate three body abrasion caused by the destructive action of fine hard particles. Loose grit passes under a pair of leather clad brass wheels, and serves as the abradant. The resulting rolling action of the particles contributes to the physical breakdown of materials.


Instrument evenly distributes grit particles.

Positioned over a Taber Rotary Abraser, this freestanding unit deposits aluminum oxide grit particles uniformly and continuously, at a specified rate. After passing under the leather wheels, used grit and any abraded material is removed by the Abraser vacuum

Two models offer simple set up.

up to 50 mm (2 inches).

alignment guide screw to set the position of the instrument. Grit distributor and vacuum removal nozzle heights are adjusted using a thumbscrew. An alignment block is incorporated into the base of Model 255, to ensure the correct location of the grit feeder in relation to the Abraser. With the ability to mount on either the right or left hand side, two instruments can be used in conjunction with Taber's Dual Rotary Abraser. A telescoping feature allows precise height adjustments, and permits testing of thicker specimens,

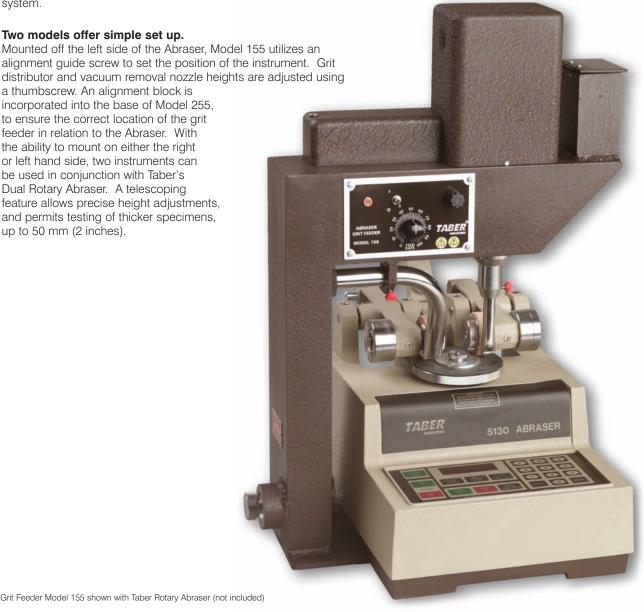

Grit Feeder Model 155 shown with Taber Rotary Abraser (not included)

Grit Feeder 155/255

Three-Body Abrasion Testing

Available in Two Models:

Model 155 - Hopper capacity, approx. 1,300 grams

Model 255 - Hopper capacity, approx. 4,500 grams


- Mounts to left or right side
- Adjustable height

Standard Features:

Plugs into accessory receptacle on rear of Taber Abraser Adjustable feed rate Alignment guide

 ϵ

Optional Accessories (sold separately):

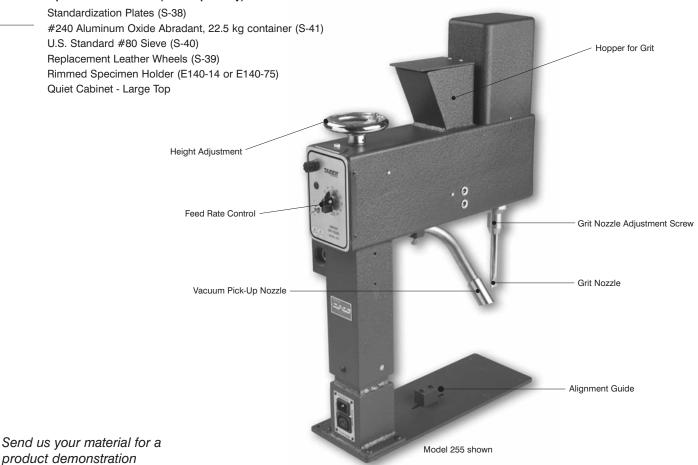

Grit Feeder Includes:

Leather Wheel Set (S-39)

Standardization Plates (S-38)

#240 Aluminum Oxide (S-41)

Alignment Guide and Mounting Hardware



455 Bryant Street North Tonawanda, New York 14120 USA For more information: Call 1.800.333.5300 (U.S.) or 716.694.4000 (outside U.S.) Fax 716.694.1450 Email us at sales@taberindustries.com Visit us at www.taberindustries.com